


variables/V-color

Magnetic Tool | COBOT Series | COBOT MAGBASE 10



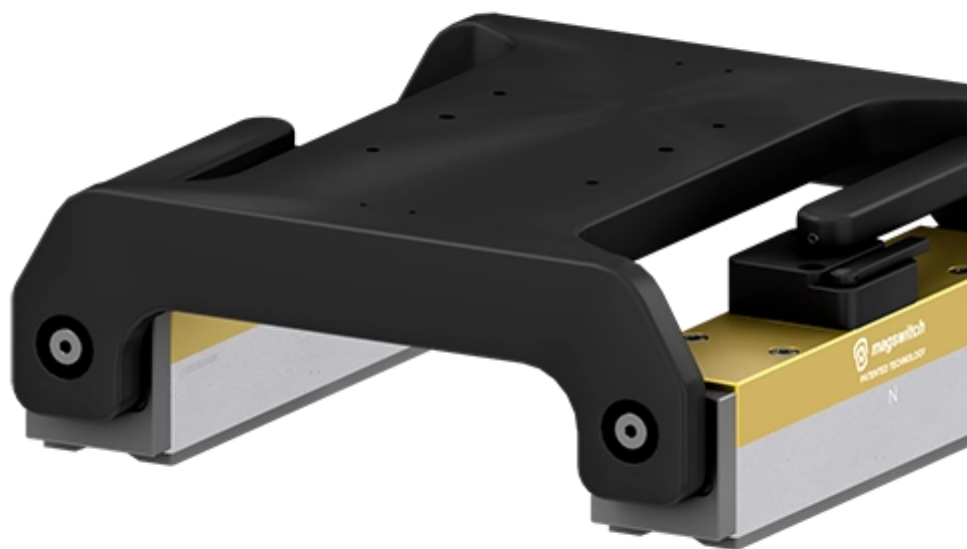

Feature

COBOT MAGBASE 10

Weight	30.00 kg
Max Breakaway ₁	2250.00 kg
Working Load ₂	10.00 kg
Optimal material thickness	12.70 mm
Max shear	494.00 kg
Magnetic pole footprint	2x 71x296mm

¹ Safety factor 2:1

² Safety factor 4:1

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

Enhanced collaborative robotics: Discover our Magswitch Cobot MagBase 10 magnetic base.

Magswitch pivoting arrays can be anchored to flat and cylindrical surfaces and feature a wide footprint to reduce the risk of peeling when the end effector is at its greatest radius. The array pivot points contain electrically isolating bushings and washers to ensure welding and static transient voltages on the part/substrate are decoupled from the robot ground.



Advantages

- Manual key for easy installation and removal
- High stability of the robot support
- Isolated to prevent any residual electrical charges



Benefits

- Limited maintenance costs
- Reduced cycle time
- Controlled integration costs



expertise in connectivity