


variables/V-color

Micromotors | Coreless BLDC motors | SVTN A 01-3660-12-D-O



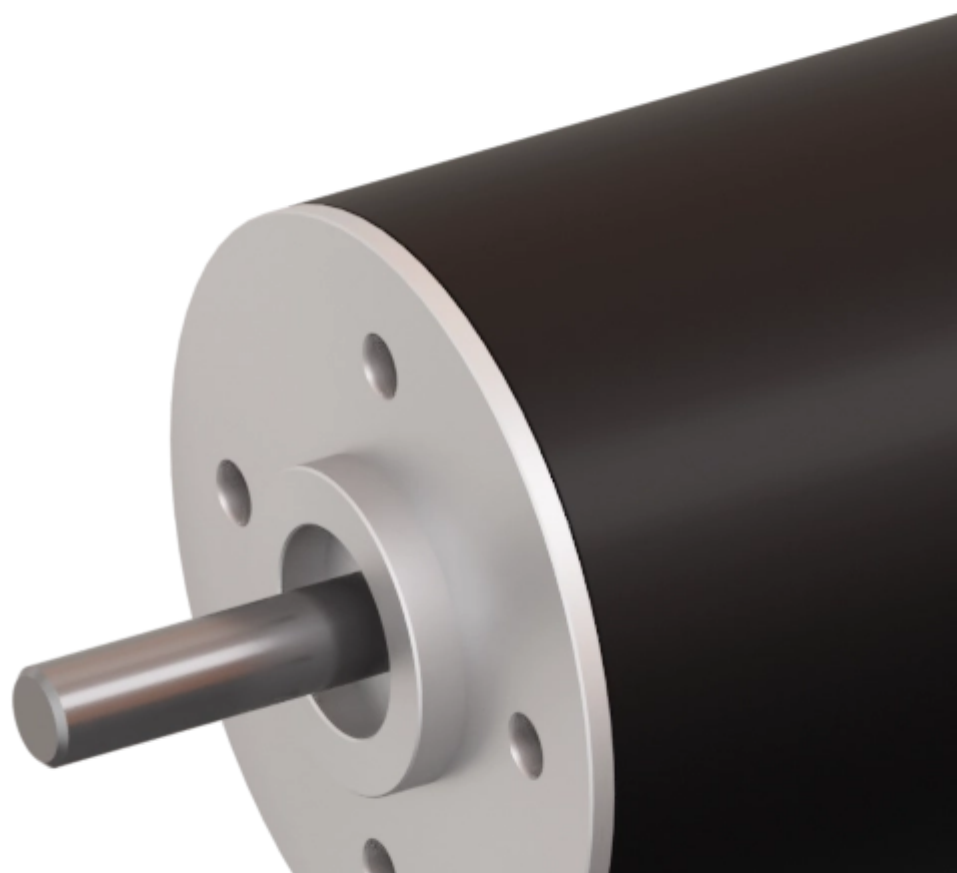

Feature

SVTN A 01-3660-12-D-O

Nominal voltage	12 V
No load speed	8050 rpm
No load current	288 mA
Nominal speed	6794 rpm
Nominal torque	82.000 mNm
Nominal current	6.090 A
Stall torque	526.000 mNm
Stall current	37.500 A
Max. efficiency	83.200 %
Terminal resistance*	0.300 ?
Terminal inductance*	0.090 mH
Torque constant	14.130 mNm/A
Speed constant	676 mNm/V

Notice : The provided technical data are the higher limits recommended in static condition. To obtain the correct dimensioning of the product, it is necessary to hold account of all the applicable dynamic forces, including the inertia of the manipulator, the configuration of the tools and the external forces applied.

2 Pole Brushless DC Motors

SVTN A 01-3660-12-D-O

Speed/torque gradient	15.30 rpm/mNm
Mechanical time constant	3.100 ms

SVTN A 01-3660-12-D-O

Rotor inertia

19.500 gcm²

The benefits of this new technology are torque and high-speed when compared to the same sizing. The lack of cogging, a reduced ripple torque, a linear correlation between speed and torque, low inertia bring performance to a greater level in terms of power, dynamics by means of reduced weights and reduced dimensions. Servotecnica's brushless motors apply hall sensors as a standard option, in addition to having the magnetic encoder option. Thanks to the sensors it is possible to control rotation speed, and, thanks to the lack of cogging, provide high performance and accuracy.



Advantages

- Winding technology without metal bodies
- Good heat dissipation and high overload capacity
- Long life expectancy



Benefits

- Light and compact, easy integration
- High reliability
- Good return on investment



pes

product
engineering
services

expertise in connectivity